

35772 U.S.
11/21/00

CLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No.: 107904

Date: November 21, 2000

BOX PATENT APPLICATION

**NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)**

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): INFORMATION OUTPUT SYSTEM UTILIZING ELECTRONIC MAIL

By (Inventors): Masaru TAKEDA; Kohei GENDA; Yasuyuki TOKI; Hironobu NAGAYAMA

- ☒ Formal drawings (Figs. 1-18; 14 sheets) are attached.
☒ A Declaration and Power of Attorney is filed herewith.
☒ An assignment of the invention to Fuji Xerox Co., LTD. is filed herewith.
☒ An Information Disclosure Statement is filed herewith.
☐ Entitlement to small entity status is hereby asserted.
☐ A Preliminary Amendment is filed herewith.
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____.
☒ Priority of foreign application No. 2000-114683 filed April 17, 2000 in Japan is claimed (35 U.S.C. §119).
☒ A certified copy of the above corresponding foreign application is filed herewith.
☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	21 - 20	= 1
INDEP CLAIMS	6 - 3	= 3
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY

RATE	FEE
	\$ 355
x 9 =	\$
x 40 =	\$
+ 135 =	\$
TOTAL	\$

**OTHER THAN A
SMALL ENTITY**

RATE	FEE
	\$ 710
x 18	\$ 18
x 80	\$ 240
+ 270	\$
TOTAL	\$ 968

- ☒ Check No. 113890 in the amount of \$968 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.

Respectfully submitted,

James A. Oliff

James A. Oliff
Registration No. 27,075

Thomas J. Pardini
Registration No. 30,411

JAO:TJP/kaf

Inventor Information

Inventor One Given Name:: Masaru
Family Name:: TAKEDA
Name Suffix::
City of Residence:: Kawasaki-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Two Given Name:: Kohei
Family Name:: GENDA
Name Suffix::
City of Residence:: Kawasaki-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Three Given Name:: Yasuyuki
Family Name:: TOKI
Name Suffix::
City of Residence:: Kawasaki-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Four Given Name:: Hironobu
Family Name:: NAGAYAMA
Name Suffix::
City of Residence:: Kawasaki-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Five Given Name ::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::

Correspondence Information

Name Line One:: Oliff & Berridge PLC
Address Line One:: P.O. Box 19928
City:: Alexandria
State or Province:: VA
Postal or Zip Code:: 22320
Telephone:: (703) 836-6400
Fax:: (703) 836-2787
Electronic Mail:: commcenter@oliff.com

Application Information

Title Line One:: INFORMATION OUTPUT SYSTEM UTILIZING
Title Line Two:: ELECTRONIC MAIL
Title Line Three::

Title Line Four::
Total Drawing Sheets:: 14
Docket Number:: 107904

Continuity Information

>This application is a::
Application One::
Filing Date::
Patent Number::
which is a::
>>Application Two::
Filing Date::
Patent Number::

Prior Foreign Applications

Foreign Application One:: 2000-114683
Filing Date:: April 17, 2000
Country:: Japan
Priority Claimed:: Yes
Foreign Application Two::
Filing Date::
Country::
Priority Claimed::
Foreign Application Three::
Filing Date::
Country::
Priority Claimed::

TITLE OF THE INVENTION
INFORMATION OUTPUT SYSTEM UTILIZING ELECTRONIC MAIL

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an information output system in which electronic mail is utilized, and particularly, it relates to a system for receiving electronic mail from a terminal apparatus and outputting (particularly, printing) information included in the electronic mail.

Description of the Related Art

At present, electronic mail is broadly utilized as a communication tool. With respect to the transmission/reception of electronic mail, a transmitter and a receiver generally utilize a personal computer (PC). In recent years, many apparatuses such as cellular phones, personal digital assistants (PDA) and notebook-size PC's are provided with an electronic mail transmission/reception function. Such a portable terminal apparatus can also be utilized to perform the transmission/reception of electronic mail.

A memory capacity in the above portable terminal apparatus is not so large, and there is a restriction on a browsing system and application software which can be mounted on the terminal apparatus. Therefore, the reception of the electronic mail and the browsing of text are possible, but it is impossible to browse a file or data attached to the

electronic mail in some cases, and it is also impossible to browse text constituted of a long sentence in other cases. Furthermore, the terminal apparatus is usually provided with no printer. Therefore, the attached file or data can be browsed on a screen, but it cannot be printed. Therefore, in the related art, it has been necessary to improve the function of the terminal apparatus, or to transfer the received electronic mail to a PC system in a home or an office. In the former case, however, the constitution of the terminal apparatus is complicated, and in the latter case, prompt communication is inhibited.

On the other hand, in a print center, and the like, a print service is presented to an unspecified number of the general public. A person who utilizes the print service transmits print information to the print center via a network. Thereby, the printing of the print information is executed in the print center. However, in order for a user to easily utilize this service, there is a room for improvement in the system. In the print center, usually, on a condition that a fee has been paid, printed matter already printed and stored is handed over to an owner. However, the printing is actually executed at a stage in which the payment is not secured, and therefore a problem arises that a print cost associated with expendable supplies cannot be collected in a case in which the owner does not come to take the printed matter or in other cases. Moreover, it is also troublesome for the service user to pay the fee every time one printed matter is received, and

a rational settlement system has been demanded. Furthermore, it is necessary to cope with computer viruses which has raised a problem in recent years.

Disclosed in Japanese Patent Application Laid-Open No. 191453/1998 is a system for utilizing a telephone line to transfer the print information to a printer of a store (e.g., a gas station) from an information processor mounted in a car, so that the printer prints the print information. In the system, a candidate for the printer for executing the printing is searched for in accordance with a car position. However, in this system, an appropriate printer is not determined as the candidate in accordance with properties of the print information. For example, even with presence of a color printer which can print a color image, there is always the possibility that the nearest monochromatic printer will be determined as the candidate. Moreover, in this system, it is presumed that the printing is executed after transfer of the print information, and a charging processing is performed during delivery of the printed matter, but a case in which the owner of the printed matter fails to come to take the printed matter is not considered. Furthermore, it is presumed that an exclusive protocol or the like needs to be developed to realize the aforementioned service, but effective utilization of the existing communication tool is not considered.

Disclosed in Japanese Patent Application Laid-Open No. 146118/1999 is a system for performing user authentication when the print service is performed. Moreover, as a print

charging mode, selection of credit card settlement, drawing from a bank account, or cash on delivery is also disclosed. However, also in this system, effective utilization of existing communication tools is not considered. Additionally, since the charging is performed after the printing of the print information, the aforementioned problem similarly occurs. Moreover, suitability of the printer for the print information is not judged.

Disclosed in Japanese Patent Application Laid-Open No. 77994/1994 is a system for utilizing electronic mail to transfer the print information to the print service center. Since an electronic mail system broadly spread at present is utilized, compared with the aforementioned two conventional systems, the system is satisfactory in user operability, and advantageous in system spreading and extending properties. However, since a constitution for integrally managing a plurality of printers to judge an appropriate printer is not used, there is a disadvantage in respect of the service. Particularly, it is impossible to select a proper print destination in consideration of the properties of the print information. Furthermore, charging is important in performing the print service, but no concrete constitution is disclosed in this respect.

Other than for the aforementioned documents, examples of the document in which the conventional art is disclosed include Japanese Patent Application Laid-Open Nos. 234464/1999, 322509/1998, 254982/1998, 27822/1997, 6005/1995, 240637/1998,

200367/1997, 191081/1999, 222527/1998, 63601/1998, 284847/1997, 288403/1999, and the like. However, the systems described in the respective documents cannot sufficiently achieve the following object of the present invention.

5 Additionally, in the above description, the related art has been described mainly with respect to print output, but additionally there are various information output systems such as screen display, sound output and dynamic image regeneration. With these situations, the aforementioned problems similarly exist. Moreover, the aforementioned respective problems similarly exist not only in a case in which the information is outputted from the portable terminal apparatus, but also in a case in which the information is outputted from a fixedly installed terminal apparatus (PC, and the like).

SUMMARY OF THE INVENTION

20 The present invention has been developed in consideration of the aforementioned conventional problems, and as an object thereof, an appropriate information output apparatus can be selected with respect to an output of information from a terminal apparatus.

 Another object of the present invention is to utilize the existing communication tool so that information transmission can be performed.

25 As a further object of the present invention, when an information output service is performed, payment for the service can be collected under a rational charging system.

(1) To achieve the aforementioned objects, according to the present invention, there is provided a system including: a managing section for managing a mail address for each output apparatus; a search section for searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from a terminal apparatus; a notifying section for notifying the terminal apparatus of the mail address of the one candidate output apparatus or the plurality of candidate output apparatuses; and a distinguishing section for distinguishing a designated output apparatus from the output apparatus group based on a destination mail address of an electronic mail issued from the terminal apparatus, and the designated output apparatus outputs information included in the electronic mail issued from the terminal apparatus.

According to the aforementioned constitution, when the information output is necessary in the terminal apparatus, the terminal apparatus issues the search request. In response to the search request, the output apparatus group registered beforehand is searched for the one candidate output apparatus or the plurality of candidate output apparatuses. As a result, the terminal apparatus is notified of the electronic mail address of the one candidate apparatus or the plurality of candidate apparatuses. In the terminal apparatus, the notified candidate output apparatus is specified as the designated output apparatus, or the designated output apparatus is selected from the plurality of notified candidate

apparatuses. Moreover, the electronic mail address of the designated output apparatus is utilized as a destination, and the electronic mail for information output is issued from the terminal apparatus. When the distinguishing section receives the electronic mail, the destination mail address described in the electronic mail is referred to, and the designated output apparatus is distinguished in accordance with the destination mail address. Furthermore, the designated output apparatus outputs the information included in the electronic mail.

The terminal apparatus is preferably a portable terminal apparatus, and examples thereof include a cellular phone, PDA, notebook-size PC, and other various apparatuses provided with an electronic mail transmission/reception function. The terminal apparatus may also be a fixedly installed PC. Examples of the information outputted by the output apparatus include text data, diagram data, static image, dynamic image data, sound data, and the like. The output apparatus is preferably disposed in accordance with a type of information to be outputted. The output apparatus is, for example, a printer, an image display, a facsimile apparatus, an image regeneration apparatus, a sound regeneration apparatus, or the like. These plurality of types of apparatuses may be included in the output apparatus group. The information to be outputted may be, for example, a file attached to the electronic mail received by the terminal apparatus, an electronic mail text, and the like. When such information is included in the electronic mail and transmitted, a transfer

function of an electronic mail server may be utilized. Specifically, in the electronic mail server, the information to be outputted is inserted in or attached to the electronic mail issued from the terminal apparatus.

5 The managing section, search section, notifying section and distinguishing section may be constituted by separate information processors, but may integrally be constituted by a single information processor.

10 Additionally, to transmit/receive the electronic mail, it is preferable to perform encryption during transmission, and perform decipherment (decryption) during reception. As a technique for this, various known techniques can be utilized.

15 (2) In the system of the present invention, preferably, the managing section further manages performance information for each output apparatus, and the search section searches for the one candidate output apparatus or the plurality of candidate output apparatuses based on the performance information. Moreover, preferably, the managing section further manages installation position information for each of
20 the output apparatuses, and the search section searches for the one candidate output apparatus or the plurality of candidate output apparatuses based on the installation position information.

25 The performance information and installation position information regarding the output apparatus are utilized during setting of a search condition in order to search for one candidate output apparatus or the plurality of candidate

output apparatuses, for example, in accordance with a content, type, data amount, output condition, and the like of the information to be outputted. For example, in consideration of the installation position of the output apparatus, the nearest output apparatus can be determined as the candidate output apparatus. By combination of various search conditions, at least one appropriate candidate output apparatus is selected.

The system of the present invention preferably includes an accounting processor for executing accounting processing before outputting the information to be outputted. The output apparatus is installed, for example, in an output service center, and the accounting processor is utilized when an output service is performed in a charged manner. In this case, by performing the accounting processing before outputting the information, specifically, by prohibiting the information from being outputted until completion of the accounting processing, it is possible to avoid problems in a case in which no fee is paid regardless of the completion of the information output, such as output cost, output burden, and apparatus wear.

(3) Moreover, in order to achieve the aforementioned objects, according to the present invention, there is provided a system including: a printer group consisting of a plurality of printers; a first server provided with an address managing section for managing a mail address for each of the printers, a search section for searching the printer group for one candidate printer or a plurality of candidate printers in response to a search request from a client (client machine),

and an address notifying section for notifying the client of the mail address of the one candidate printer or the plurality of candidate printers; and a second server provided with a receiving section for receiving an electronic mail issued by the client, a distinguishing section for distinguishing a designated printer from the printer group based on a destination mail address of the electronic mail, and a converting section for converting information included in the electronic mail in accordance with the designated printer, and the designated printer prints the converted information.

According to the aforementioned constitution, after searching for the one candidate printer or the plurality of candidate printers (candidate output apparatuses) in response to the search request from the client, the client is notified of the mail address of the one candidate printer or the plurality of candidate printers. The client utilizes the address to prepare the electronic mail for information output with designation of the designated printer, and transmits the mail. By referring to the destination mail address of the electronic mail, the designated printer for performing the printing of the information (information to be outputted) included in the electronic mail is distinguished. Additionally, prior to the printing, the converting section converts the information included in the electronic mail. Preferably, the information is converted to a page description language (PDL) file.

When only one candidate printer is searched in the

constitution, the printer may be automatically or manually selected as the designated printer. When a plurality of candidate printers (or identifiers) are displayed on a screen on a client side, a list display form is preferably employed. As a page description language (PDL), various general-purpose or special-purpose languages can be used. Of course, the printing can be performed without performing such PDL conversion, and the PDL conversion becomes unnecessary in a case where the PDL file is transferred from the first instance.

Preferably, the first server further includes an information managing section for managing the performance information and installation position information for each of the printers, and an information notifying section for notifying the client of at least one of the performance information and the installation position information of the candidate printer.

According to the aforementioned constitution, since the performance information (function, specification, operation situation, and the like) or the installation position information on the respective candidate printers can be referred to or utilized on the terminal apparatus, it is possible to automatically select or for the user to select a most suitable designated printer.

Preferably, electronic mail is utilized to perform communication between the client and the first server. Additionally, a communication method other than electronic mail may be utilized to establish the communication between

both. For example, by opening a WEB page on the first server, and using the page as a user interface, the candidate printer may be selected.

5 Preferably, the system includes an authentication apparatus for performing user authentication prior to print processing of the converted information in the designated printer. As a result, the print processing is performed after it is judged that the user is authorized, so that an unauthorized user is prevented from obtaining printed matter, and printing waste in this case is prevented.

10 Preferably, the second server further includes a separating section for separating the electronic mail into a plurality of mail elements, and an individual managing section for individually managing the respective mail elements, and the information to be printed corresponds to one mail element.

15 According to the aforementioned constitution, since the electronic mail is managed in a state of the plurality of separated mail elements, the mail elements can be advantageously processed individually.

20 Preferably, the second server further includes a storing section in which the information constituting the electronic mail is stored, a monitor section for monitoring empty capacity of the storing section, and a restricting section for restricting reception of a print request in accordance with
25 the empty capacity of the storing section.

According to the aforementioned constitution, the empty capacity of the storing section in which the electronic mail

itself or the PDL file is stored becomes zero or very little, the reception of print requests is then restricted, and data stored in the storing section can be protected.

Preferably, the second server further includes a
5 restriction notifying section for notifying the client of reception restriction when the reception of the print request is restricted. According to the constitution, it can be judged on the client side whether or not the printing is possible, and a problem that the issued print request is not processed, or another problem, can be prevented beforehand. When the storing section (storing area) exists for each printer, the reception restriction of print requests may be performed for each printer, or the client may be notified of information indicating that the reception is
10 possible/impossible for each printer.

Preferably, the system includes a storing section for storing the PDL file, and a deleting section for deleting the stored PDL file when a predetermined condition is satisfied. The deleting of the PDL file is usually performed after
15 completion of the printing of the PDL file, but the PDL file may be stored for a fixed period in consideration of reprinting or the like. Moreover, the deleting can be performed automatically, or performed manually operation of a system manager or the user.

25 Preferably, the second server further includes a virus processing section for performing a virus check on the electronic mail. In recent years, the spread of electronic

computer viruses using the medium of electronic mail has been regarded as a problem, but by performing the check before the printing, the system can be protected from viruses. It is general to discard the electronic mail infected by the virus, but the electronic mail may be processed after removing the virus.

Preferably, the virus processing section includes a report preparing section for preparing a virus check report when it is judged by the virus check that the virus is present, and a report print control section for performing a control to print the virus check report instead of the printing of the information included in the electronic mail in the designated printer when the presence of a virus is determined. According to the constitution, by issuing the virus check report, the user can be informed of the presence of a virus.

Preferably, the system includes an accounting processing section for performing accounting processing prior to the printing of the virus check report. The virus check is performed utilizing a system resource, and this is reflected when charging is performed. Thereby, abuse of the system by issuing the print request for a purpose of the virus check can be eliminated.

(4) Moreover, to achieve the aforementioned objects, the present invention includes a managing section for managing a mail address for each output apparatus, a search section for searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in

response to a search request from a terminal apparatus, a notifying section for notifying the terminal apparatus of the mail address of the one candidate output apparatus or the plurality of candidate output apparatuses, a distinguishing section for distinguishing a designated output apparatus from the output apparatus group based on a destination mail address of an electronic mail issued from the terminal apparatus, and a charging processor for performing a charging processing prior to outputting of information included in the electronic mail, and allowing the designated output apparatus to output the information included in the electronic mail after the charging processing.

According to the aforementioned constitution, the information can actually be outputted after the accounting processing is completed, and this can prevent a problem where the output is completed but the user pays no fee and a resource utilization fee cannot be collected.

Preferably, the accounting processor includes a selecting section for allowing the user to select an accounting system, and an accounting executing section for performing accounting in accordance with the selected accounting system. Examples of the accounting system include cash collection, fee collection utilizing a prepaid card, settlement utilizing a credit card, settlement utilizing a bank account for an individual or a company, settlement utilizing another external settlement mechanism, and the like.

(5) Moreover, in order to achieve the aforementioned

objects, according to the present invention, there is provided a method comprising steps of: managing a mail address for each output apparatus; searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from a terminal apparatus; notifying the terminal apparatus of the mail address of the one candidate output apparatus or the plurality of candidate output apparatuses; distinguishing a designated output apparatus from the output apparatus group based on a destination mail address of an electronic mail issued from the terminal apparatus; and outputting information included in the electronic mail issued from the terminal apparatus by the designated output apparatus.

In the aforementioned constitution, the respective steps can be realized on a single computer, but the respective steps may be performed by using a plurality of computers in a combined manner.

(6) Moreover, in order to achieve the aforementioned objects, a recording medium of the present invention is a storage medium in which a program to be executed on a computer is stored, and the program includes a module for managing a mail address for each output apparatus, a module for searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from the terminal apparatus, a module for notifying the terminal apparatus of the mail address of the candidate output apparatus, and a module for distinguishing a

designated output apparatus from the output apparatus group based on a destination mail address of an electronic mail issued from the terminal apparatus.

In the aforementioned constitution, the program is stored in the computer, or read in. A concept of the medium includes all transportable recording mediums, and additionally includes fixed recording mediums such as ROM and hard disk. Moreover, transmission of the program via a network is one mode for carrying out the present invention.

(7) Moreover, in order to achieve the aforementioned objects, according to the present invention, there is provided a system including: an output apparatus group consisting of a plurality of output apparatuses; a transportable terminal apparatus provided with an electronic mail transmission/reception function; a first mail server for presenting an electronic mail transmission/reception service to the terminal apparatus; a first management server provided with a managing section for managing a mail address for each of the output apparatuses, a search section for searching the output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from the terminal apparatus, and a notifying section for notifying the terminal apparatus of the mail address of the candidate output apparatus; a second mail server for receiving an electronic mail issued from the terminal apparatus; and a second management server provided with means for distinguishing a designated output apparatus

from the output apparatus group based on a destination mail address of the received electronic mail, and means for presenting information included in the electronic mail to the designated output apparatus.

5 The system is preferably constructed on networks such as Internet and LAN, and particularly the existing electronic mail system seen from a terminal apparatus side can be utilized as it is, which provides an advantage that the system is satisfactory in a general-purpose property and an extending property.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the overall constitution of a print system according to the present invention.

Fig. 2 is a block diagram showing a constitution of an output destination management server shown in Fig. 1.

Fig. 3 is a diagram showing content of an output destination management table of the output destination management server.

Fig. 4 is a block diagram showing a constitution of a print server shown in Fig. 1.

Fig. 5 is a block diagram showing a constitution of a printer shown in Fig. 1.

Fig. 6 is a flowchart showing a connecting operation of the output destination management server shown in Fig. 1.

Fig. 7 is a flowchart showing a search operation of the

output destination management server shown in Fig. 1.

Fig. 8 is a flowchart showing an interrupting operation of the output destination management server shown in Fig. 1.

Fig. 9 is a flowchart showing an operation of the print server shown in Fig. 1.

Fig. 10 is a flowchart showing an operation of the printer shown in Fig. 1.

Fig. 11 is a diagram showing an information input screen displayed on the printer.

Fig. 12 is a diagram showing a list browsing screen displayed on the printer.

Fig. 13 is a diagram showing a fee confirmation screen displayed on the printer.

Fig. 14 is a diagram showing a payment method selection screen displayed on the printer.

Fig. 15 is a diagram showing a payment instruction screen displayed on the printer.

Fig. 16 is a diagram showing the payment instruction screen displayed on the printer.

Fig. 17 is a block diagram showing a constitution for performing an accounting processing with respect to a plurality of printers with one charger.

Fig. 18 is a block diagram showing a constitution of the printer on which various servers are mounted.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the present invention will be

described hereinafter with reference to the drawings.

Fig. 1 shows the preferred embodiment of a system according to the present invention. Specifically, Fig. 1 shows an electronic mail utilizing network print system 8 connected to a network 10. This print system 8 is a system for receiving electronic mail transmitted from a terminal apparatus 12 to perform the printing of information included in the mail (information to be printed). Fig. 1 shows the print system as the embodiment of the present invention, but the present invention can be applied to various information outputting systems. Additionally, the network 10 is constituted as an aggregate of a plurality of sub-networks including Internet. One or some of the sub-networks may utilize radio communication. Additionally, functions of respective apparatuses on the print system 8 are substantially realized by executing a program, and this program is stored on a memory in each apparatus.

In Fig. 1, the network 10 is connected to the terminal apparatus 12 and a mail server 14. In this embodiment, the terminal apparatus 12 is a cellular phone, PDA, notebook-size PC or another portable apparatus provided with an electronic mail transmission/reception function. Of course, the apparatus may be a fixedly installed PC. The mail server 14 is a known server for offering an electronic mail service, and offers electronic mail transmission and reception services to the terminal apparatus 12. Specifically, the mail server 14 is provided with a function of relaying the electronic mail

for the terminal apparatus 12 from the outside to distribute the electronic mail to the terminal apparatus 12, and a function of relaying the electronic mail issued for another apparatus from the terminal apparatus 12 to distribute the mail to the apparatus.

According to the aforementioned constitution, the terminal apparatus 12 receives the electronic mail distributed from the mail server 14. In this case, the terminal apparatus 12 may issue a request to the mail server 14 to obtain a newly arrived mail, or the mail server 14 may automatically distribute the newly arrived mail to the terminal apparatus 12. When a data amount of the electronic mail is large, the electronic mail may be distributed to the terminal apparatus 12 in a divided manner in accordance with a storage capacity. When a plurality of electronic mails arrive, index information of the mails may be distributed to the terminal apparatus 12 in a list form. A flow of processing to obtain the electronic mail is shown by (A) in Fig. 1. In a display section (not shown) of the terminal apparatus 12, a subject, sender, transmission date, and the like are displayed for each distributed electronic mail in the list form.

The electronic mails received by the terminal apparatus 12 include a mail in which a text data amount is too large to be displayed, a mail in which much display time is required, a mail in which an attached file content cannot be displayed, a mail in which a content can be browsed but wants to be separately printed, and the like. In this case, the print

system 8 described below is utilized.

The print system 8 constitutes an information output system. In the present embodiment, the print system 8 is constituted by an output destination management server 16, a printing mail server 20, a print server 22 and a plurality of printers 24.

The output destination management server 16 is provided with an output destination management table 18 which will be described later, and refers to the table 18 to search a candidate printer with respect to the terminal apparatus 12 and provide the terminal apparatus 12 with information such as a mail address. The printing mail server 20 is a server for receiving the electronic mail issued from the terminal apparatus 12. The print server 22 refers to a destination mail address included in header information in the received electronic mail, distinguishes a designated printer based on the address, further converts the information included in the electronic mail (information as a print object) to a PDL file, and supplies the file to the designated printer. Additionally, processing for distinguishing the designated printer from the destination mail address may be executed by the printing mail server 20. The printer 24 is constituted of a printer, a combined machine, a facsimile apparatus, or another image forming apparatus. Additionally, in the present invention, an output apparatus is not limited to these.

Usually, each print center is provided with one printer or a plurality of printers, and the print centers are

scattered/installed in each region. In this case, the output destination management server 16, printing mail server 20, and print server 22 may be installed in a management center for integrating/managing a plurality of print centers, but may be disposed in a scattered manner. Alternatively, as described later, these may be integrally incorporated in any printer 24.

Fig. 2 shows a structural example of the output destination management server 16. A controller 28 performs an operation control of each component of the output destination management server 16, and the controller 28 is connected to the network 10 via a communicator 26. For the output destination management table 18, as shown in Fig. 3, managed for each printer 24 are the information such as the mail address, domain, performance (presence/absence of a color print function, presence/absence of a double surface print function, sheet conditions such as maximum and minimum sheet sizes, and the like), and geographical position (location) where the printer is installed. A table preparation and update section 30 of Fig. 2 is provided with functions of preparing and updating the output destination management table. When a new printer 24 is added to the system 8, a record with respect to the printer 24 is added. Moreover, when the printer 24 is detached from the system 8, the corresponding record is deleted. Furthermore, when the specification of each printer 24 is changed, a change content is reflected in the output destination management table 18. A searcher 32 is provided with a function of searching one printer or a

plurality of printers (candidate printers) 24 suitable for printing the information to be printed in accordance with a search condition when a search request including the search condition is received from the terminal apparatus 12. This respect will be described later in detail. A user interface 34 is constituted of a display section and an input section, so that a system manager performs maintenance of the output destination management server.

In Figs. 1 and 2, the terminal apparatus 12 and output destination management server 16 are connected to each other on the network 10 utilizing the electronic mail, or utilizing other communication means (e.g., browsing of WEB page on WWW, and the like). This is shown by (B) in Fig. 1.

When a necessity of performing information output occurs in the terminal apparatus 12, first, the search request of the printer to output the information is issued to the output destination management server. In this case, the search conditions including the performance and installation position of the printer are added to the search request. For example, at least one of the search conditions "color print is possible", "double surface print is possible", "the printer is installed in Tokyo", "the printer is within a certain distance from a present location of the terminal apparatus", and the like is added. Of course, by successively designating a plurality of search conditions, the candidate printer may be limited in a stepwise manner. The search condition may be selected or inputted by a user on the terminal apparatus 12,

or may be automatically set in accordance with properties of the information to be printed.

On the other hand, in the output destination management server 16 having received the search request, the searcher 32 searches the printer (or print center) as a candidate in accordance with the aforementioned search condition included in the search request. Subsequently, on specifying one or a plurality of candidate printers as a search result, the information on the candidate printer is transmitted to the terminal apparatus 12 as a search requester. In this case, for the sake of convenience of limiting/selecting by the user, along with the mail address, the performance, location, and other information are preferably transmitted together.

In the present embodiment, the output destination management server 16 monitors an operation situation or a job processing situation of each printer 24, and such status information can be included during transmission of information to the terminal apparatus 12. With the status information, the user can exclude a printer congested due to the job processing from selection, and ascertain that a printer is in a discontinued operation state, so that any printer can be designated. Of course, in the aforementioned search, in consideration of the status information, a printer that is unsuitable for performing print processing may be excluded from being a candidate. Moreover, charging estimation information on a fee per page and output of the information to be printed may be transmitted together. Furthermore, a notice

may be given to the effect that a large amount of the information to be printed is accumulated in the system as described later and this makes it difficult to receive a new print request, or that such reception restriction occurs with each printer.

As described above, by presenting various information with respect to the candidate printer in addition to the mail address of the candidate printer, when the user selects the printer in the terminal apparatus 12, the selection can be performed more appropriately, and rational system operating can be expected.

Additionally, when a large number of candidate printers are searched, it is preferable to group the printers in fixed units and perform transmission to the terminal apparatus 12 for each group. In this case, a transmission unit may be adjusted in accordance with a usable memory capacity of the terminal apparatus.

Furthermore, in the terminal apparatus 12 having obtained the information on the candidate printer from the output destination management server 16, a list of candidate printers is displayed. The list includes information such as an identifier, mail address, domain, performance, location, operation situation, and utilization fee of the candidate printer as occasion demands. Therefore, the user refers to such information to designate (select) the printer to which a print request is actually issued. Of course, by further setting the search condition as described above, the search

may be performed again. Moreover, by automating the designation based on the information to be outputted, a selection result may be confirmed by the user. The information of the designated printer is stored in a memory of the terminal apparatus 12, and the printer to which the print request has been issued can preferably be confirmed later as occasion demands in the constitution. Usually, since the transmitted mail is stored in the mail system, by checking the record, the issuance destination of the print request issued by oneself can easily be confirmed. Additionally, when the past search result can be utilized to designate the printer on the terminal apparatus 12, the aforementioned search can be omitted.

As described above, after any printer is designated from a printer group in the terminal apparatus 12, the terminal apparatus 12 issues the electronic mail including the information to be printed to the printer 24. This is shown by (C) in Fig. 1. The electronic mail is, for example, an electronic mail (newly prepared mail) including information newly prepared on the terminal apparatus 12, or a received but transferred electronic mail (transferred mail) including information which cannot be utilized or referred to. When the latter electronic mail is transferred, in general, except for addition of predetermined information, the received electronic mail is transferred as it is without performing any special operation on the electronic mail. Here, predetermined information to be added includes print attributes (double

surface print, number of print sheets, sheet size, and the like) and other conditions associated with image formation, the mail address of the terminal apparatus 12, user's information, and the like. But predetermined information is not limited to these information. As described above, when deletion or processing of the information in the electronic mail, file name change, or the like fails to be performed, identity of the information received by the terminal apparatus 12 can be held. Of course, the processing of the information can be allowed as occasion demands.

Additionally, in addition to issuance of the electronic mail directly from the terminal apparatus 12, the terminal apparatus 12 sends an issuance request of the electronic mail to the mail server 14, so that the mail server may issue the electronic mail. Particularly, when a size of an attachment file of the electronic mail distributed to the terminal apparatus 12 is large and the file is stored in the mail server 14, or when the file is stored on another apparatus, such a file is attached to the electronic mail on the mail server 14, and preferably transmitted to the print system 8 in the constitution. Besides, various electronic mail issuance systems can be employed.

The aforementioned electronic mail issued as the print request is obtained by the printing mail server 20 as shown by (C) in Fig. 1. Specifically, the mail address of each printer 24 constituting the print system 8 is registered in the printing mail server 20, and the electronic mail provided with

the mail address of the printer 24 as a transmission destination is obtained. The printing mail server 20 essentially functions as a mail server exclusively for reception, but also functions as a mail server for transmission when transmission of the electronic mail or a predetermined notice to the terminal apparatus 12 from the print system 8 becomes necessary.

Additionally, with the transmission of the electronic mail from the terminal apparatus 12, the information included in the electronic mail is encrypted, and the printing mail server 20 or the print server 22 may decrypt the information. According to this constitution, system security can be enhanced.

The print server 22 functions as a printer control server, and performs communication with the printing mail server 20 as shown by (D) in Fig. 1. For example, the print server 22 periodically inquires of the printing mail server 20 about presence/absence of arrival of the new electronic mail, and executes a print control described later in detail when the new electronic mail arrives. Of course, on receiving the new electronic mail, the printing mail server 20 may spontaneously notify the print server 22 of the arrival, or automatically transfer the electronic mail to the print server 22.

Fig. 4 shows a structural example of the print server 22. A controller 35 is connected to the network 10 via a communicator 36. The controller 35 performs communication with the printing mail server 20 or a plurality of printers 24

via the network 10. An external storage apparatus 38 is storage means for storing respective information constituting the obtained electronic mail, the PDL file described later, and various other information. A mail transmitter/receiver 40 is means for transmitting/receiving the electronic mail with the printing mail server 20. The mail transmitter/receiver 40 obtains the new electronic mail. Moreover, when the notice to the terminal apparatus 12 becomes necessary, the electronic mail issued by the mail transmitter/receiver 40 is transmitted to the terminal apparatus 12 via the printing mail server 20 and mail server 14 of Fig. 1. A mail separation processor 42 separates the received electronic mail for respective mail elements, and the respective mail elements are individually managed on the external storage apparatus 38.

This feature will be concretely described. The received electronic mail is separated into the additional information, mail text constituted of subject, text, and the like, and attached file, and these are individually managed. Additionally, by including information for specifying the information to be printed in the electronic mail and recognizing the information, the information to be printed may be specified, or as a default setting only the attached file or the entire electronic mail may be constantly regarded as the information to be printed.

The separation processing is performed for the sake of convenience in data handling, concretely, in order to reduce search time, memory consumption, and the like. For example,

in a case in which a transmitter address is searched with respect to the electronic mail with a very large attached file size, a processing efficiency is better when the search object is set to the electronic mail text rather than to the entire electronic mail.

A virus test executor 46 is a module for checking for the presence/absence of electronic computer viruses with respect to the electronic mail. Before and after the separation processing, a virus test is executed, and only data in which the absence of viruses is conformed as a test result is stored in the external storage apparatus 38. This processing protects the system from computer viruses. On the other hand, electronic mail including viruses is generally discarded. Additionally, after removing viruses, the data may be stored.

A deleting section 44 is means for deleting the electronic mail or the PDL file described later from the external storage apparatus 38 when a predetermined deletion condition is satisfied. By appropriately deleting unnecessary information, a system storage capacity can be effectively utilized. Particularly, since a large amount of data such as a color image is probably handled, it is preferable to effectively perform the deletion processing.

A converter 48 is a module for converting the information to be printed (e.g., attached file data) to the PDL file. In this case, a type of page description language (PDL) is selected in accordance with the type and model of the designated printer, and the information to be printed is

converted to description in the selected page description language. On the other hand, by referring to the destination mail address of the electronic mail, the designated printer is distinguished. This distinction processing is performed, for example, by the controller 35.

In the present embodiment, the electronic mail in which the presence of viruses is recognized by the virus test is discarded without being subjected to the PDL conversion processing. Instead, a report indicating a virus test result is prepared as the PDL file. This report includes information for specifying a type of virus, a place where the virus exists, and the like. As described later, by performing the virus test after completion of charging, or printing the virus test report after the completion of accounting, a resource utilization fee in the system can securely be collected.

In Fig. 4, a user interface 50 is constituted of a display section and input section, and utilized by a system manager in system maintenance or the like. Moreover, a user authenticator 52 includes a user database, and constitutes means for performing authentication with respect to the user when the printer 24 is actually allowed to perform printing as described later. The user authenticator 52 may be disposed in each printer 24.

As described above, in the print server 22, the information to be printed in the electronic mail is converted to the PDL file, and the file is temporarily stored in the external storage apparatus 38. Depending on the electronic

mail, it is converted to plural PDL files. Additionally, conversion to the PDL file may be performed after the completion of accounting. Moreover, immediately after the conversion to the PDL file, the PDL file may be transferred to the designated printer. The transfer of the PDL file to the designated printer from the print server 22 is shown by (E) in Fig. 1.

Fig. 5 shows a structural example of the printer 24. A controller 58 is connected to the print server 22 via a communicator 56 and network 10. In this case, the electronic mail may be utilized as a communication tool, an exclusive network may be utilized, or a general file transfer protocol may be utilized.

The controller 58 is connected to an image data storing section 74 as an external data storage apparatus. An image reader 76 is means for obtaining the PDL file from the print server 22, and the obtained PDL file is stored in the image data storing section 74. An image forming section 78 is means for interpreting a PDL file content to form an image of each page. The formed image is transferred onto a sheet by a printing section 80. A printing condition of this case is transferred from the print server 22 as described above. A user interface 68 is constituted of a display section 70 and an input section 72.

In the example shown in Fig. 5, the printer 24 is provided with an accounting unit 60. In the accounting unit 60, an accounting processor 62 is provided with a function of

demanding agreement with accounting from the user before performing the actual printing of the information, and allowing the printing to be executed when the agreement is obtained and the accounting is completed, a function of calculating an accounting amount in accordance with the information to be printed and information size, and a function of allowing the user to select an accounting principle. An accounting table 66 stores a condition for the accounting processing, and stores an accounting result as occasion demands. A fee collector 64 is an apparatus for collecting cash.

When the information to be printed is allowed to be actually printed, the user operates the user interface 68, and inputs a print instruction with respect to the electronic mail transferred by oneself. In this case, the accounting processor 62 demands input of the user's own information. With agreement of the inputted own information with already registered information, that is, with a correct user, after the accounting processing is performed, the image is actually formed and printed as described above. The user authentication is actually executed by the user authenticator of Fig. 4, but each printer 24 may perform the processing. Additionally, when the user authentication fails to be performed, a message to this effect is displayed on the display section 70.

The print server 22 transmits the PDL file as the information to be printed and information of print attributes

to the printer 24 as described above. In addition to these items of information, information for the user authentication may be transmitted when the printer 24 performs the user authentication. Transmission timing for each item of information can be appropriately set in accordance with a user authentication completion timing or an accounting processing completion timing. For example, the PDL file may be transferred to the printer 24 after the completion of the user authentication or the accounting processing, but prior to the completion the PDL file may also be transferred to the printer 24. Moreover, the PDL conversion processing may not be performed until the completion of the user authentication or the accounting processing. Furthermore, the attribute information is usually transferred together with the PDL file, but the former or the latter may be transmitted ahead of the other.

By referring to Figs. 1 to 5 an operation of the print system 8 shown in Fig. 1 will next be described using a flowchart.

Figs. 6 to 8 are flowcharts showing an operation example of the output destination management server 16 shown in Fig. 1. First, Fig. 6 shows a search process, and it is judged in S101 whether or not there is a connection request from the terminal apparatus 12. Here, when it is judged that there is such a connection request, connection of the output destination management server 16 to the terminal apparatus 12 is established in S102. This is shown by (B) in Fig. 1. In S103,

the search process shown in Fig. 7 is started.

In the search process shown in Fig. 7, in S201, first an operation discontinuation monitor process is started as described later and shown in Fig 8. In S202, the search condition included in the search request is received. Subsequently, in S203, the candidate printer is searched based on the search condition as described above. In S204, as a search execution result, information indicating one or a plurality of candidate printers is transmitted to the terminal apparatus 12 from the output destination management server 16. In S205, the presence or absence of a further search from the terminal apparatus 12 is judged, and respective steps from S202 are repeatedly executed when there is an additional search condition. In S206, the output destination management server 16 is disconnected from the terminal apparatus 12, and in S207 the operation discontinuation monitor process ends.

Fig. 8 shows the operation discontinuation monitor process. It is judged in S301 whether or not there is an instruction for discontinuation from the terminal apparatus 12, namely, the user, and when there is such a discontinuation instruction, in S302 interruption to the process shown in Fig. 7 for the operation discontinuation is issued. Subsequently, it is judged in S303 whether or not to complete the search process, and when the search process is not completed, an interruption state is continued until cancellation of the discontinuation instruction from the user. Moreover, to complete the search process, the search process and

accompanying processes are all ended.

After the aforementioned respective processings are performed, the printer 24 which is allowed to print the information to be printed is designated in the terminal apparatus 12. Specifically, by using the mail address of the designated printer 24 as the destination, the electronic mail is prepared and issued. This electronic mail is received by the printing mail server 20 shown in Fig. 1.

Fig. 9 is a flowchart showing an operation example of the print server 22 shown in Fig. 1.

First, in S401, the mail addresses of the printers are extracted one by one in order from the printer group, and in S402 the print server 22 inquires of the printing mail server 20 about the presence or absence of arrival of the new electronic mail with respect to the mail address. Here, when there is no new arrival, in S403 an interval timer waits for elapse of a fixed time, again in S401 the next mail address is extracted, and the judgment of S402 is again executed. Subsequently, this is repeated. On the other hand, it is judged in S402 that there is the new arrival, and in S404 an empty capacity is determined with respect to the external storage apparatus (system capacity) 38 of the print server 22. Here, it is judged that the empty capacity is insufficient, then in S412 the mail address on the side of the transmitter having transmitted the electronic mail is extracted, and next in S413 an upper limit of the storage capacity is obtained and a message indicating that the print request cannot therefore

be processed is prepared. In S414, the electronic mail including the message is prepared, and issued to the terminal apparatus 12 as a print requester. Subsequently, the respective steps from S401 are repeatedly executed.

5 On the other hand, it is judged in S404 that there exists a sufficient empty capacity for receiving the electronic mail, and then in S405 the electronic mail is taken into the print server 22 from the printing mail server 20. Subsequently, in S406 a processing of separating the information into the mail elements constituting the electronic mail is executed. In S407, a test is carried out to judge whether an electronic computer virus is present or absent with respect to the respective information as described above. In S408, when the presence of a virus is found as the test result, instead of conversion of the information as the print object to PDL, in S409 the PDL file with a fixed form sentence is prepared as the test report indicating the presence of a virus. On the other hand, when no virus exists, in S410 the processing of conversion to the PDL file is executed in accordance with the type of the selected (designated) printer. Subsequently, in 20 S411, the PDL file prepared in S410 or S409 is stored prior to the transmission to the printer 24. As described above, the PDL file is transmitted to the printer in response to the request from the printer 24, or transmitted to the printer 24 before the request. 25

Fig. 10 is a flowchart showing an operation example of the printer 24 shown in Fig. 1. First, in S501, the image is

displayed, for example, as shown in Fig. 11, and the user's own information is inputted on the image. The own information corresponds, for example, to a password, user ID, or the like. In S502, the user authentication is executed, and it is judged whether the inputted user's own information agrees/disagrees, for example, with the user's own information registered in the print server 22. Here, when the own information disagree with each other, in S503, display is performed to the effect that the user's information is invalid and no authentication can be performed. On the other hand, when the authentication of the user is completed, the processing shifts to S504.

Prior to the execution of S504, for example, as shown in Fig. 12, a list of information to be printed for each user is displayed, thereby allowing the user to select the information to be actually printed. In this case, the list includes a reception date, page number, print fee, and the like. Of course, the identifier of the information to be printed, and the like may be added to the list. In S504, the user is requested to confirm whether or not to agree with charging of the fee. In this case, for example, an image is displayed as shown in Fig. 13. Here, when the user fails to agree with the charging, it is judged in S505 whether or not to discontinue the processing. In a case in which the user confirms that there is no agreement with the charging, in S506 the image is displayed to the effect that no agreement can be obtained and the processing is discontinued, and steps on and after S501 are executed.

On the other hand, when the agreement with the charging is confirmed in S504, S507 is executed. In S507, for example, first as shown in Fig. 14, an image which urges the user to select a payment method is displayed. For example, cash on delivery or charges forward is selected. In this case, for example, when the user wants payment by a prepaid card, an image is displayed as shown in Fig. 15, so that the user may be urged to insert the prepaid card. Moreover, when the user wants the payment by a credit card, an image is displayed as shown in Fig. 16, so that the user may be urged to insert the credit card. Furthermore, for example, settlement may be performed in cooperation with an external settlement system shown in Fig. 1.

In any case, collection of the fee is executed by a fee collection system in S507 and this is confirmed. For example, the fee collector 64 shown in Fig. 5 is an apparatus for collecting cash. When a necessary amount of cash is inserted into the fee collector 64, steps on and after S508 are executed.

In S508, for example, the information to be printed (PDL file) is taken onto the printer 24 from the print server 22, the PDL file is then interpreted, and each page image is formed. Subsequently, in S509 each page image is printed on the sheet. In S510, for example, the accounting information or the information on job disposal is recorded on the accounting table shown in Fig. 5 or a job management table shown in Fig. 4. Executed in S511 is a processing of deleting

the PDL file stored in one or both of the printer 24 and the print server 22.

The accounting information or the information of job disposal may be constituted in such a manner that the information can be referred to from the terminal apparatus 12 as occasion demands. This constitution has an advantage that the information printed by oneself in the past, processing situation, and the like can be specified utilizing the terminal apparatus 12. Moreover, in the aforementioned embodiment the PDL file is deleted immediately after the completion of printing as shown in S511, but instead of performing this uniform deletion, as occasion demands, the PDL file may be stored for re-printing, and deleted after elapse of a fixed period. Furthermore, this deletion can be executed manually by the user or the system manager. Additionally, by issuing a deletion request from the terminal apparatus 12, and processing the request by the print server 22, the electronic mail or the PDL file as an object may be deleted.

Moreover, in the aforementioned embodiment, in a case in which the empty capacity of the storage apparatus on the system decreases so that any newly received mail cannot be received as shown in Fig. 9, if the electronic mail indicating that reception is impossible is transmitted to the terminal apparatus 12 having issued the print request at the time, instead of the transmission, by monitoring this situation beforehand in the output destination management server 16, a message indicating that no print processing can be performed

under existing circumstances may be returned on receiving the search request from the terminal apparatus 12.

Furthermore, in the aforementioned embodiment, as shown in Fig. 5, each printer 24 is provided with the charging unit 60 but, for example, by disposing a charger 60A separately from a printer 24A as shown in Fig. 17, it is also possible to collectively perform the charging processing with respect to a plurality of printers 24A on the charger 60A. Additionally, in the aforementioned embodiment, the printer 24 is constituted separately from the respective servers 16, 20, 22 but, as shown in Fig. 18, any printer 84 may be provided with an output destination management server 16A, a printing mail server 20A, a print server 22A, further a charging unit 60B and a printing unit. In this case, the integrated printer 84 manages its print processing, and additionally manages another printer 24A.

Additionally, in the above description, to perform deletion of the PDL file or the like, an electronic mail may be issued beforehand to the terminal apparatus 12 in order to demand confirmation as to whether the deletion may be performed or not. Alternatively, the issuance of the electronic mail may be combined with the deletion of the file after the fixed period.

According to the aforementioned constitution, in a case in which the information from the terminal apparatus is outputted, there is an advantage that the appropriate output apparatus can be selected and the transmission of the

information can rationally be performed utilizing the existing communication tool. Moreover, when the information output service is performed, a compensation for the service can be collected under the rational accounting system.

WHAT IS CLAIMED IS:

1. An information output system comprising:

5 a managing section for managing a mail address for each output apparatus;

a search section for searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from a terminal apparatus;

10 a notifying section for notifying said terminal apparatus of the mail address of said candidate output apparatus; and

15 a distinguishing section for distinguishing a designated output apparatus from said output apparatus group based on a destination mail address of an electronic mail issued from said terminal apparatus,

20 said designated output apparatus outputting information included in the electronic mail issued from said terminal apparatus.

25 2. The information output system according to claim 1 wherein said managing section further manages performance information for each of said output apparatuses, and

said search section searches for said one candidate output apparatus or the plurality of candidate output apparatuses based on said performance information.

3. The information output system according to claim 1

wherein said managing section further manages installation position information for each of said output apparatuses, and said search section searches for said one candidate output apparatus or the plurality of candidate output apparatuses based on said installation position information.

4. The information output system according to claim 1, further comprising an accounting processor for performing accounting processing before outputting the information included in said electronic mail.

5. An information output system comprising:
a printer group comprising a plurality of printers;
a first server comprising an address managing section for managing a mail address for each of said printers, a search section for searching said printer group for one candidate printer or a plurality of candidate printers in response to a search request from a client, and an address notifying section for notifying said client of the mail address of said one candidate printer or the plurality of candidate printers; and
a second server comprising a receiving section for receiving an electronic mail issued from said client, a distinguishing section for distinguishing a designated printer from said printer group based on a destination mail address of the electronic mail, and a converting section for converting information included in said electronic mail in accordance with said designated printer,

said designated printer printing said converted information.

6. The information output system according to claim 5 wherein said first server further comprises:

an information managing section for managing performance information and installation position information for each of said printers; and

an information notifying section for notifying said client of at least one of the performance information and the installation position information with respect to said one candidate printer or the plurality of candidate printers.

7. The information output system according to claim 5 wherein the electronic mail is utilized to perform communication between said client and said first server.

8. The information output system according to claim 5, further comprising an authentication apparatus for performing user authentication prior to print processing of said converted information in said designated printer.

9. The information output system according to claim 5 wherein said second server further comprises:

a separating section for separating said electronic mail into a plurality of mail elements; and

an individual managing section for individually managing

said respective separated mail elements, and

said information to be printed corresponds to one mail element.

5 10. The information output system according to claim 5 wherein said second server further comprises:

a storing section in which the information constituting said electronic mail is stored;

a monitor section for monitoring an empty capacity of said storing section; and

a restricting section for restricting reception of a print request in accordance with lack of capacity of said storing section.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
1

a storing section for storing said PDL file; and
a deleting section for deleting the PDL file stored in
said storing section when a predetermined condition is
satisfied.

14. The information output system according to claim 5
wherein said second server further comprises a virus
processing section for executing a virus check with respect to
said electronic mail.

15. The information output system according to claim 14
wherein said virus processing section comprises:

a report preparing section for preparing a virus check
report when it is judged by said virus check that a virus
exists; and

a report print control section for performing a control
to allow said virus check report to be printed instead of the
printing of the information included in said electronic mail
in said designated printer when it is judged that said virus
exists.

16. The information output system according to claim 15,
further comprising an accounting processor for performing
accounting processing prior to the printing of said virus
check report.

17. An information output system comprising:

a managing section for managing a mail address for each output apparatus;

a search section for searching an output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from a terminal apparatus;

a notifying section for notifying said terminal apparatus of the mail address of said one candidate output apparatus or the plurality of candidate output apparatuses;

a distinguishing section for distinguishing a designated output apparatus from said output apparatus group based on a destination mail address of an electronic mail issued from said terminal apparatus; and

an accounting processing section for performing accounting processing prior to outputting of information included in said electronic mail, and allowing the designated output apparatus to output the information included in said electronic mail after executing the charging processing.

18. The information output system according to claim 17 wherein said accounting processing section comprises:

a selecting section for allowing a user to select an accounting system; and

an accounting executing section for performing accounting in accordance with said selected accounting system.

19. An information output method in which electronic

mail is utilized, comprising steps of:

managing a mail address for each output apparatus;

searching an output apparatus group for one candidate
output apparatus or a plurality of candidate output

apparatuses in response to a search request from a terminal
apparatus;

notifying said terminal apparatus of the mail address of
said one candidate output apparatus or the plurality of
candidate output apparatuses;

distinguishing a designated output apparatus from said
output apparatus group based on a destination mail address of
the electronic mail issued from said terminal apparatus; and

outputting information included in the electronic mail
issued from said terminal apparatus by said designated output
apparatus.

20. A storage medium in which a program to be executed
on a computer is stored, said program comprising:

a module for managing a mail address for each output
apparatus;

a module for searching an output apparatus group for one
candidate output apparatus or a plurality of candidate output
apparatuses in response to a search request from a terminal
apparatus;

a module for notifying said terminal apparatus of the
mail address of said one candidate output apparatus or the
plurality of candidate output apparatuses; and

a module for distinguishing a designated output apparatus from said output apparatus group based on a destination mail address of an electronic mail issued from said terminal apparatus.

21. An information output system comprising:

an output apparatus group comprising a plurality of output apparatuses;

a transportable terminal apparatus provided with an electronic mail transmission/reception function;

a first mail server for presenting an electronic mail transmission/reception service to said terminal apparatus;

a first management server comprising a managing section for managing a mail address for each of said output apparatuses, a search section for searching the output apparatus group for one candidate output apparatus or a plurality of candidate output apparatuses in response to a search request from said terminal apparatus, and a notifying section for notifying said terminal apparatus of the mail address of said one candidate output apparatus or the plurality of candidate output apparatuses;

a second mail server for receiving an electronic mail issued from said terminal apparatus; and

a second management server comprising a distinguishing section for distinguishing a designated output apparatus from said output apparatus group based on a destination mail address of said received electronic mail, and a presenting

section for presenting information included in said electronic mail to said designated output apparatus.

00716445-112100

ABSTRACT OF THE DISCLOSURE

There is disclosed an information output system in which an output destination management server is provided with an output destination management table for managing a mail address, performance information, and the like for each printer. In response to a search request from a terminal apparatus, the output destination management table is used to search for one or a plurality of candidate printers. The terminal apparatus is notified of the mail address of one candidate printer or the plurality of candidate printers. The terminal apparatus uses the mail address of a designated printer as a destination, and issues an electronic mail including the information to be printed. A printing mail server receives the electronic mail. The information included in the electronic mail is transferred to the designated printer from a print server. Accounting processing is executed prior to the printing of the information.

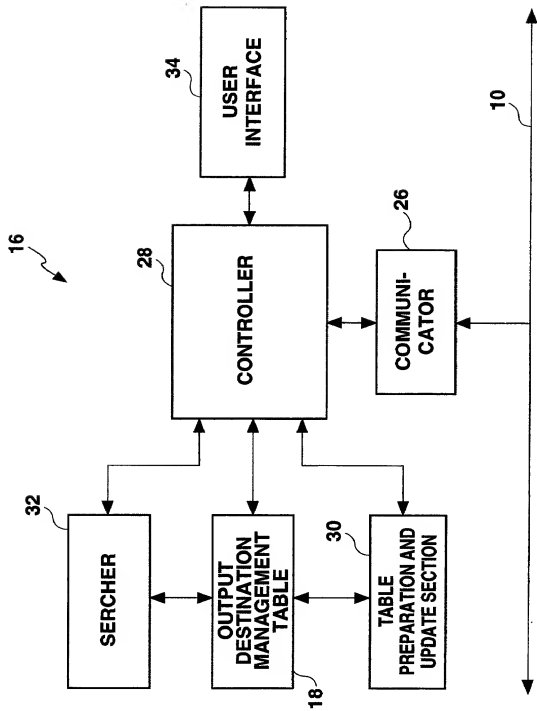


Fig. 2

ADDRESS	DOMAIN	COLOR	SCREEN	MAXIMUM SHEET SIZE	MINIMUM SHEET SIZE	LOCATION
PRINTER 1	minato.printservice.com	YES	YES	A3	A5	Roppongi, Minato-ku
PRINTER 2	minato.printservice.com	YES	YES	A3	A6	Akasaka, Minato-ku
PRINTER 3	kawasaki.printservice.com	YES	YES	A3	B5	Mizonokuchi, Takatsu-ku, Kawasaki-shi
PRINTER 4	ebina.printservice.com	NO	YES	A3	A5	Chuo, Ebina-shi
PRINTER 5	ebina.printservice.com	NO	YES	A3	A5	Hongo, Ebina-shi

Fig. 3

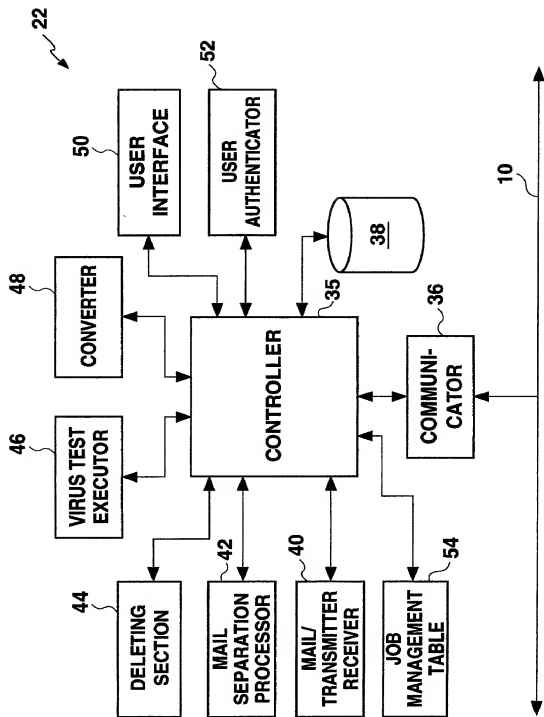


Fig. 4

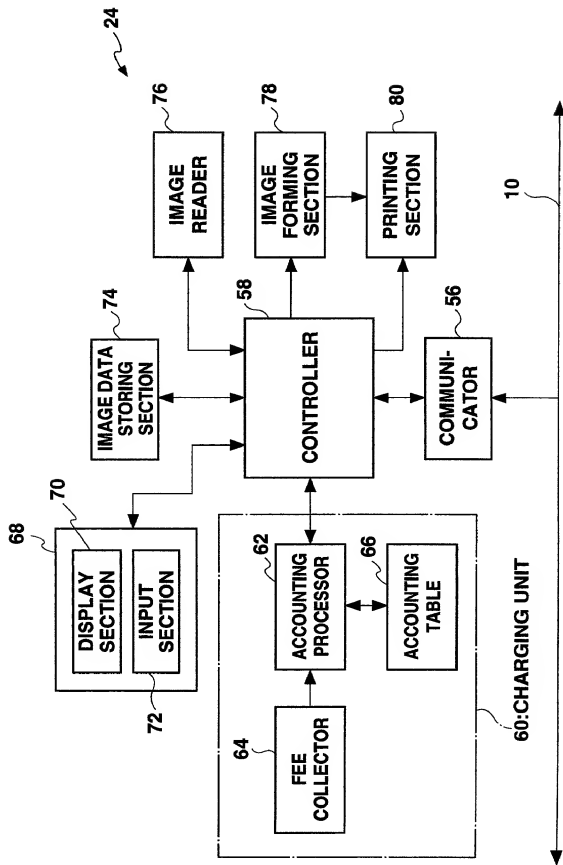


Fig. 5

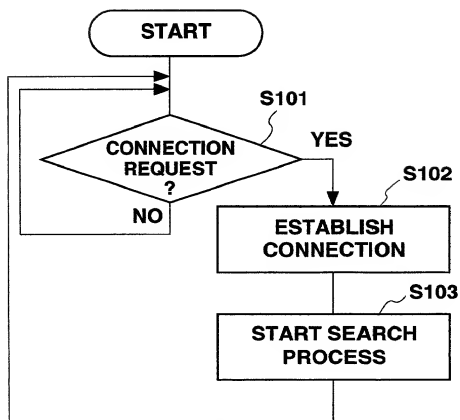


Fig. 6


```
graph TD; START([START]) --> S301{DISCONTINUATION INSTRUCTION FROM USER?}; S301 -- YES --> S302[ISSUE OPERATION DISCONTINUATION INTERRUPTION TO HOST PROCESS]; S302 --> S303{SEARCH PROCESS COMPLETED?}; S303 -- YES --> END([END]); S303 -- NO --> S301;
```

The flowchart illustrates the operation discontinuation process. It begins with a **START** terminal, leading to a decision diamond **S301: DISCONTINUATION INSTRUCTION FROM USER?**. If the answer is **YES**, the process proceeds to a rectangular block **S302: ISSUE OPERATION DISCONTINUATION INTERRUPTION TO HOST PROCESS**. From S302, the flow goes to another decision diamond **S303: SEARCH PROCESS COMPLETED?**. If the answer is **YES**, the process ends at the **END** terminal. If the answer is **NO**, the flow loops back to the entry point of S301.

Fig. 8

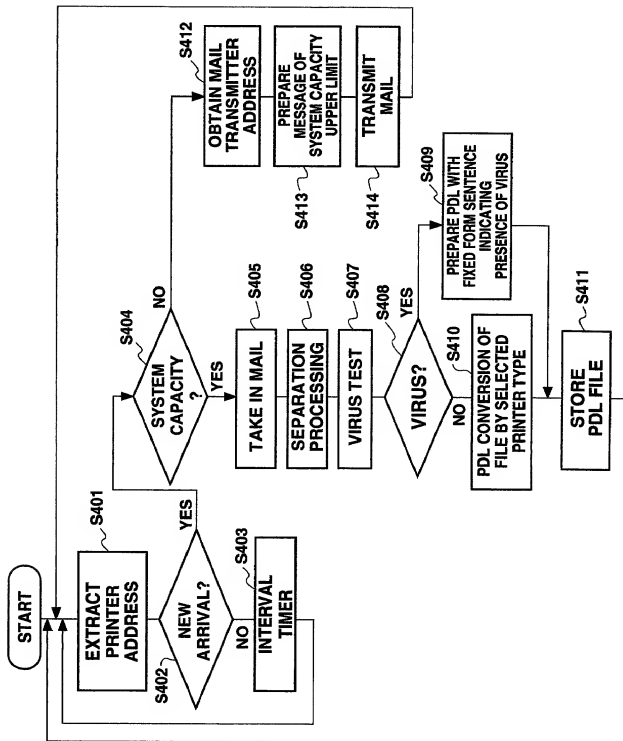


Fig. 9

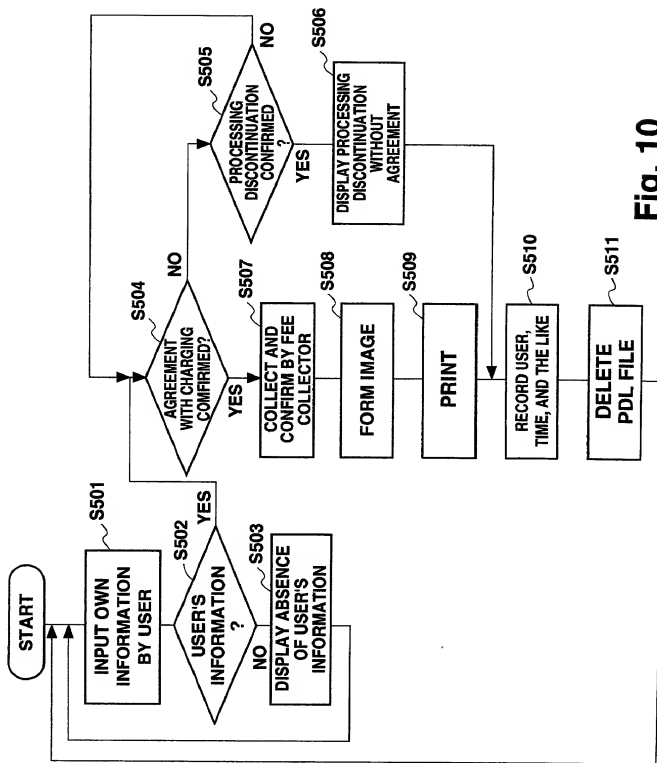


Fig. 10

**INPUT PERSONAL
INFORMATION**

**INPUT YOUR
INFORMATION**

NEXT

Fig. 11

PROCESSABLE LIST

**YOU CAN PERFORM
THREE PROCESSINGS.
SELECT PROCESSING.**

RECEPTION DATE	PAGE NUMBER	FEE	
◆ 2000.1.20 5:30	4	160 YEN	△
◇ 2000.1.20 5:35	6	240 YEN	▼

SELECT ALL

NEXT

Fig. 12

FEE CONFIRMATION

**PROCESSING REQUIRES
160 YEN. IS THIS OK?**

YES

NO

Fig. 13

**PAYMENT METHOD
SELECTION**

**SELECT PAYMENT
METHOD.**

CASH

**CHARGES
FORWARD**

NEXT

Fig. 14

PAYMENT

**INSERT CASH OR
PREPAID CARD.**

0 YEN/160 YEN

NEXT

Fig. 15

PAYMENT

INSERT CREDIT CARD.

0 YEN/160 YEN

NEXT

Fig. 16

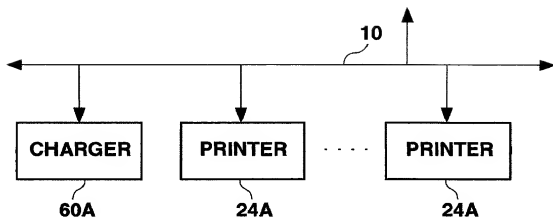


Fig. 17

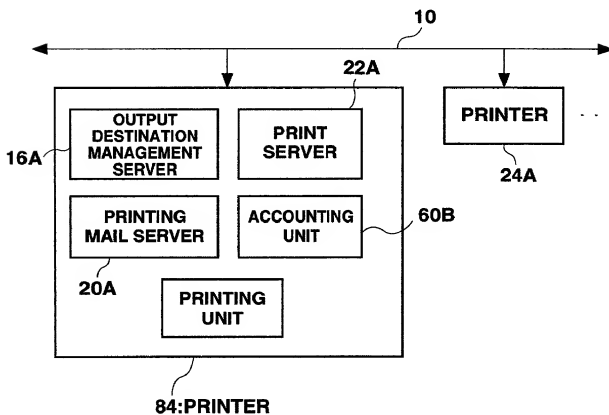


Fig. 18

Declaration and Power of Attorney for Patent Application

特許出願宣言書兼委任状

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便宛先および国籍は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、特許請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

INFORMATION OUTPUT SYSTEM UTILIZING ELECTRONIC MAIL

その明細書を
(該当するものにチェック)

☐ ここに添付する。

☐ 年 月 日に

出願番号第 として提出され、

年 月 日に補正し、
(該当する場合)

私は、前記のとおり補正した特許請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦施行規則第 37 章第 1 条第 56 項に従い、本願の特許性の有無について重要な情報を開示すべき義務を有することを認める。

私は、米国法第 35 章第 119 条に基づく下記の外国特許出願もしくは発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の提出日前の提出日を有する外国特許出願もしくは発明者証出願および/もしくは米国仮出願を以下に明記する：

the specification of which
(check one)

☒ is attached hereto.

☐ was filed on 年 月 日 as

Application Serial No. 番号

and was amended on 年 月 日
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior foreign and/or provisional applications

先行外国出願/仮出願

Priority claimed

優先権の主張

2000-114683

(Number/番号)

Japan

(Country/国名)

17/April/2000

(Day/Month/Year Filed/提出年月日)

☒

(Yes/はい)

☐

(No/いいえ)

(Number/番号)

(Country/国名)

(Day/Month/Year Filed/提出年月日)

☐

(Yes/はい)

☐

(No/いいえ)

(Number/番号)

(Country/国名)

(Day/Month/Year Filed/提出年月日)

☐

(Yes/はい)

☐

(No/いいえ)

(Number/番号)

(Country/国名)

(Day/Month/Year Filed/提出年月日)

☐

(Yes/はい)

☐

(No/いいえ)

私は、米国法第 35 章第 120 条に基づく下記の米国特許出願の利益を主張し、本願の特許請求の範囲各項に記載の主題が米国法第 35 章第 112 条の第 1 段落に規定の態様で先の米国出願に開示されていない限度において、先の出願の提出日と本願の国内提出日もしくは PCT 国際出願提出日の間に公表された連邦施行規則第 37 章第 1 条第 56 項に記載の重要な情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、米国法第 18 章第 1001 条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手續を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。(代理人氏名および登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771 and
Mario A. Costantino, Reg. No. 33,565

Send Correspondence To/書類送付先:

OLIFF & BERRIDGE
P. O. BOX 19928
ALEXANDRIA, VIRGINIA 22320
USA
Telephone: (703) 836-6400

Direct Telephone Calls To (name and telephone number)/直通電話連絡先(名称および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名
Masaru TAKEDA

Inventor's signature/発明者の署名

Date/日付
November 8, 2000

Residence/住所

Kawasaki-shi, Kanagawa, Japan

Citizenship/国籍

Japan

Post Office Address/郵便宛先

c/o Fuji Xerox Co., Ltd., 2-1, Sakado 3-chome, Takatsu-ku, Kawasaki-shi,
Kanagawa, Japan

Full name of second joint inventor (if any)/第二共同発明者の氏名(該当する場合)

Kohei GENDA

Second inventor's signature/第二発明者の署名

Date/日付
November 8, 2000

Residence/住所

Kawasaki-shi, Kanagawa, Japan

Citizenship/国籍

Japan

Post Office Address/郵便宛先

c/o Fuji Xerox Co., Ltd., 2-1, Sakado 3-chome, Takatsu-ku, Kawasaki-shi,
Kanagawa, Japan

Supply similar information and signature for third and subsequent joint inventors.

第三又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

Full name of third joint inventor (if any)/第三共同発明者の氏名(該当する場合)	
Yasuyuki TOKI	
Third inventor's signature/第三発明者の署名	Date/日付
<i>Yasuyuki Toki</i>	November 8, 2000
Residence/住所 Kawasaki-shi, Kanagawa, Japan	
Citizenship/国籍 Japan	
Post Office Address/郵便宛先 c/o Fuji Xerox Co., Ltd., 2-1, Sakado 3-chome, Takatsu-ku, Kawasaki-shi, Kanagawa, Japan	
Full name of fourth joint inventor (if any)/第四共同発明者の氏名(該当する場合)	
Hironobu NAGAYAMA	
Fourth inventor's signature/第四発明者の署名	Date/日付
<i>Hironobu Nagayama</i>	November 8, 2000
Residence/住所 Kawasaki-shi, Kanagawa, Japan	
Citizenship/国籍 Japan	
Post Office Address/郵便宛先 c/o Fuji Xerox Co., Ltd., 2-1, Sakado 3-chome, Takatsu-ku, Kawasaki-shi, Kanagawa, Japan	
Full name of fifth joint inventor (if any)/第五共同発明者の氏名(該当する場合)	
Fifth inventor's signature/第五発明者の署名	
Date/日付	
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便宛先	
Full name of sixth joint inventor (if any)/第六共同発明者の氏名(該当する場合)	
Sixth inventor's signature/第六発明者の署名	
Date/日付	
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便宛先	

Supply similar information and signature for seventh and subsequent joint inventors.
第七又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。